

SERIES 5105 5106 .079"(2.0m/m) Pitch Wire-to-wire Connectors



All bear JH mark


JH



STANDARDS



E141311(豪訊)

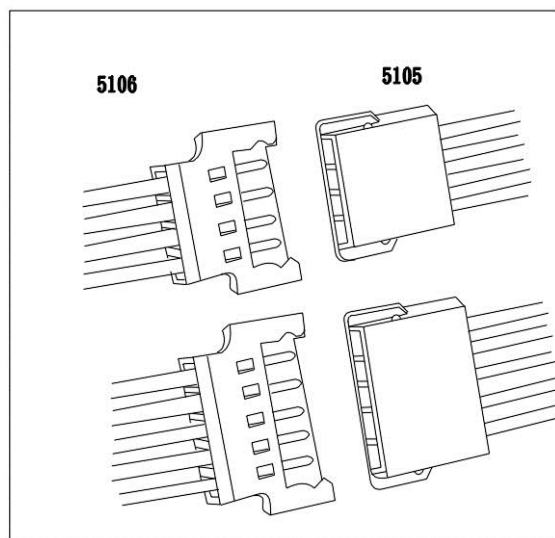

SPECIFICATIONS


- ⊛ Circuit: 2~10
- ⊛ Voltage rating: 125V AC, DC
- ⊛ Withstanding voltage: 500V AC/minute
- ⊛ Insulation resistance: 1000M Ω min
- ⊛ Temperature range: -25°C ~ +85°C
- ⊛ Unit(單位): m/m
- ⊛ Material(材質): UL94V-0 nylon 66
- ⊛ Tolerance(公差): ± 0.3 m/m
- ⊛ Current rating:

AVG	#24	#26	#28
Amperes	2.0	1.5	1.0


WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
AVG				
28-24	1.1-1.5	PHOSPHOR BRONZE	TIN-Plated GOLD-FLASH	10.000

WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
AVG				
28-24	1.1-1.5	PHOSPHOR BRONZE	TIN-Plated GOLD-FLASH	10.000


T ERMINAL 5105

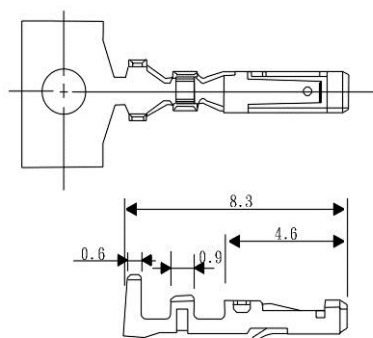


T ERMINAL 5106

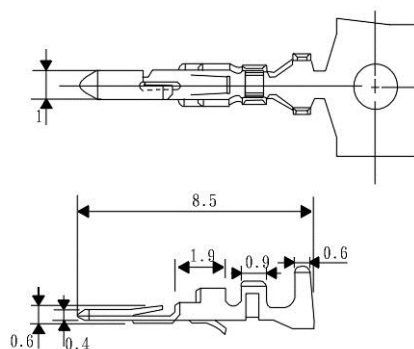


H OUSING 5105-02

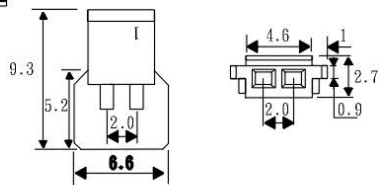


H OUSING 5106-02

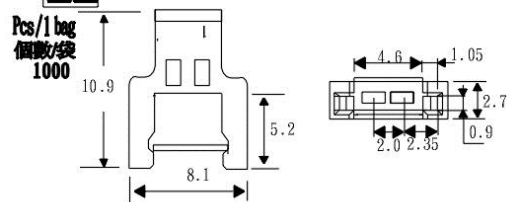


H OUSING 5105-03

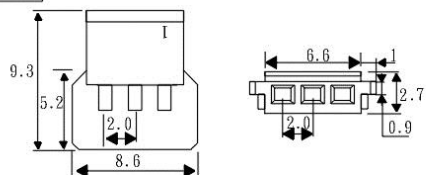


H OUSING 5106-03

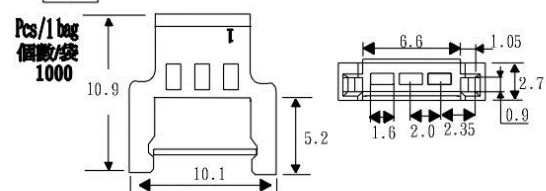


H OUSING 5105-04

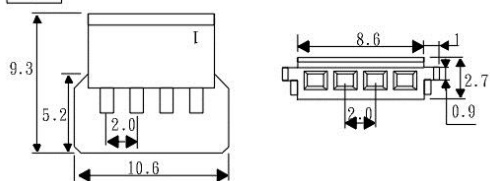


H OUSING 5106-04

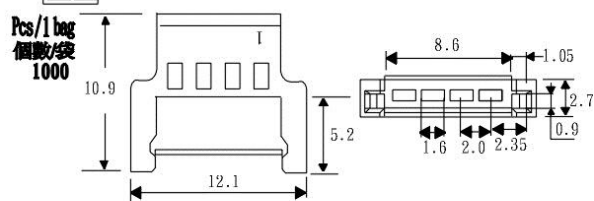


H OUSING 5105-05




H OUSING 5106-05

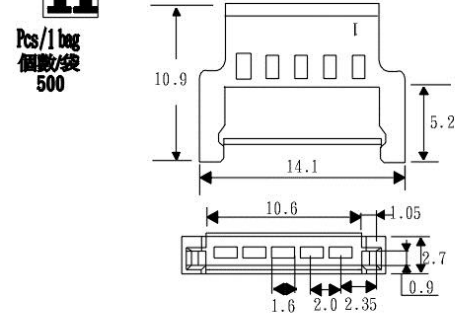

H OUSING 5105-06




H OUSING 5106-06

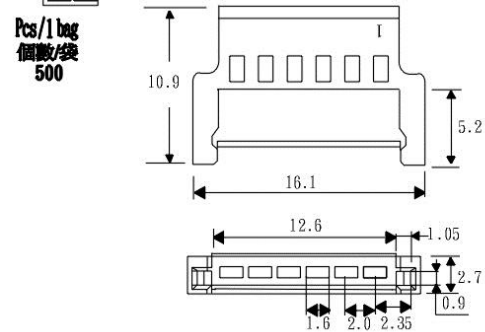




OUSING 5105-07




OUSING 5106-07

Pcs/1 bag
個數/袋
500

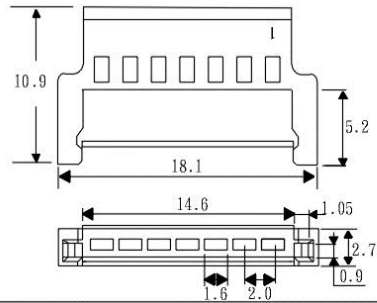


OUSING 5105-08

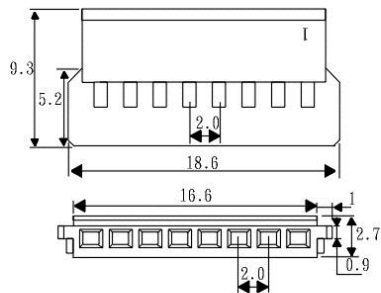


OUSING 5106-08

Pcs/1 bag
個數/袋
500

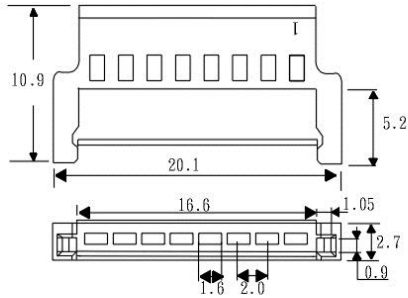


OUSING 5105-09

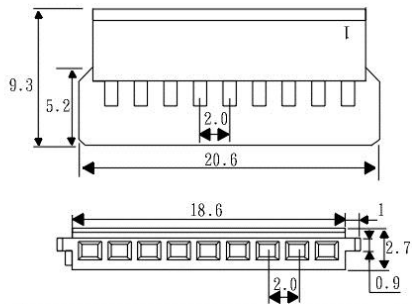


OUSING 5106-09

Pcs/1 bag
個數/袋
500

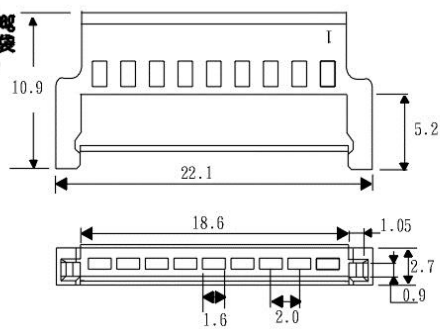


OUSING 5105-10

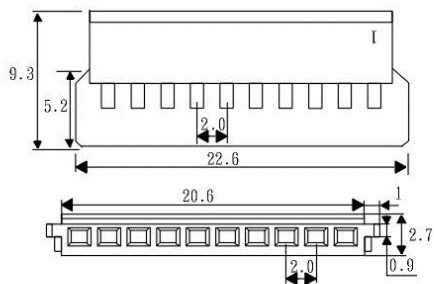


OUSING 5106-10


Pcs/1 bag
個數/袋
500

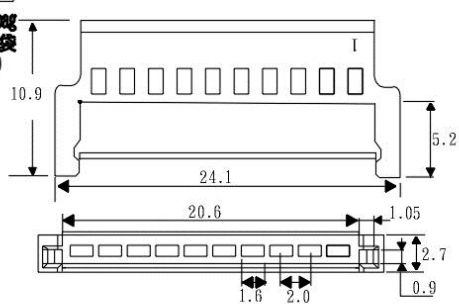

豪訊-承認書

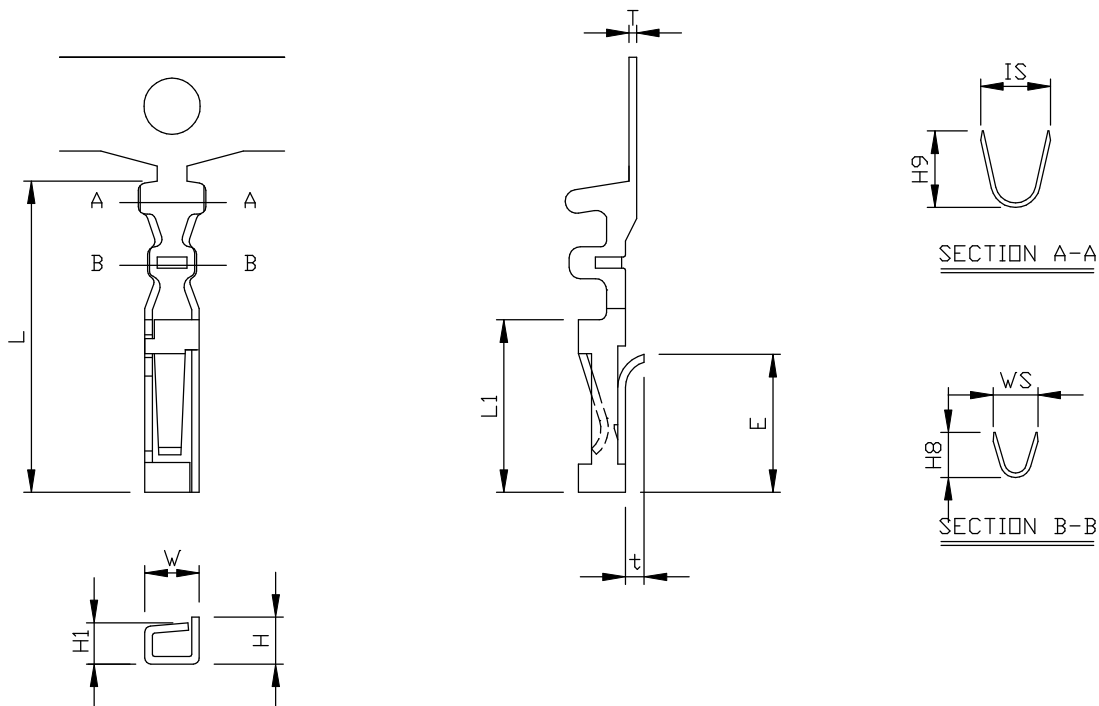[illegible]

豪訊-承認書

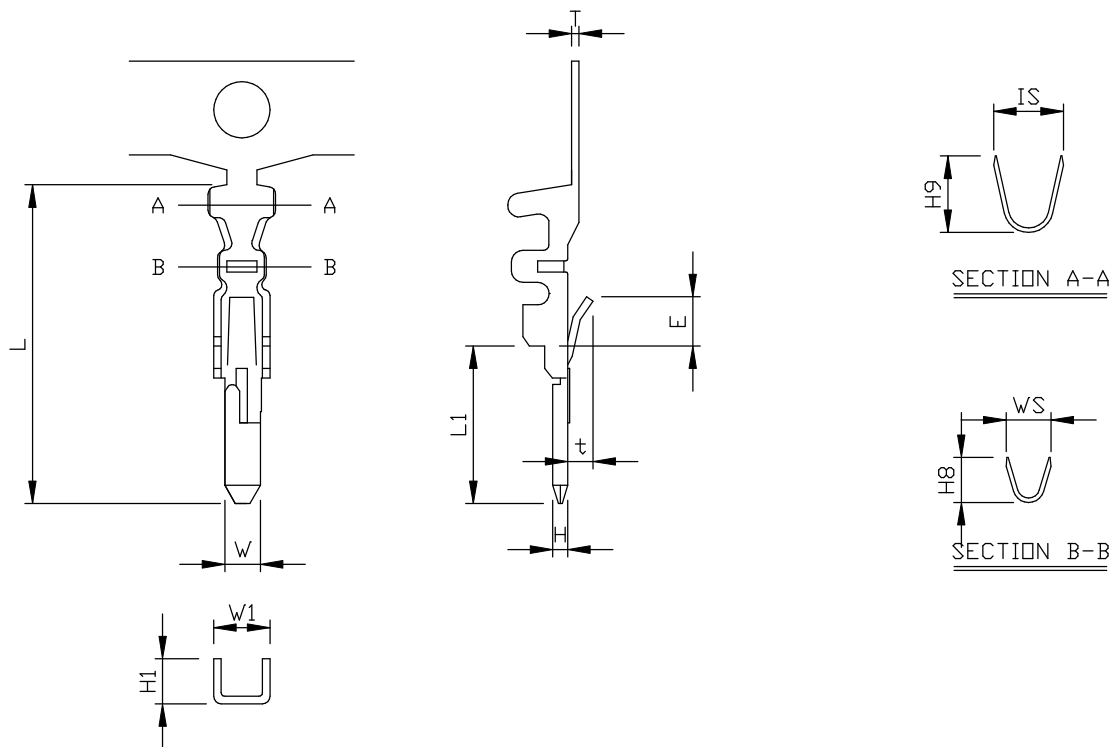

適用電線		線皮外徑	端子材質	塑膠材質	包裝數量		重量	表面處理	連續,單粒
28 - 24			BRASS. SH		10000 PCS		KG	-2	BS
尺寸標準					外觀標準			功能標準	
項目	規格		重要度	備註	項目	規格	配合塑膠 公母對插	塑膠編號	
	0.2 ± 0.03				M1	JH		插入力	KG MAX
L	8.60 ± 0.3				M2	一紋		脫拔力	KG MIN
L1	4.20± 0.3				M3	倒角	公母對插	端子編號	
IS	1.90± 0.3				M4	無毛邊		插入力	KG
WS	1.40± 0.3			配合 PIN	M5	龜裂,變形		脫拔力	KG MIN
E	1.30± 0.2				料規		其他	材重	
t	0.65± 0.15				PITCH			配合 PIN	
H	0.4 ± 0.03				沖壓距				
H1	1.2 ± 0.15				一沖數量				
W	1.0 ± 0.08				備註:				
W1	1.5 ± 0.15								
H8	1.5 ± 0.25								
H9	1.9 ± 0.25								
修改紀錄									
版次	年月日	修改內容	修改者	核對	製表	校對	日期	品名: JH-T5106	